

Edge bead

Edge bead for finishing of construction boards (plasterboards, OSB etc.).

Material:

- PVC

Features and benefits:

- for board thickness 9.5, 12.5, 15 mm
- aesthetic board connection
- protects the boards against mechanical damage

Instruction for use:


Clip the bead on the board edge. The position of the bead can be adjusted to fit to the adjacent construction.

Packaging, storage and transport:

Store in a dry place in horizontal position to prevent the profile sagging and deformation.

Certification:

The product is subject to any harmonized standard. The product was voluntarily certified at TZÚS Praha, s.p.. The product is certified with certificate number 060-040966.

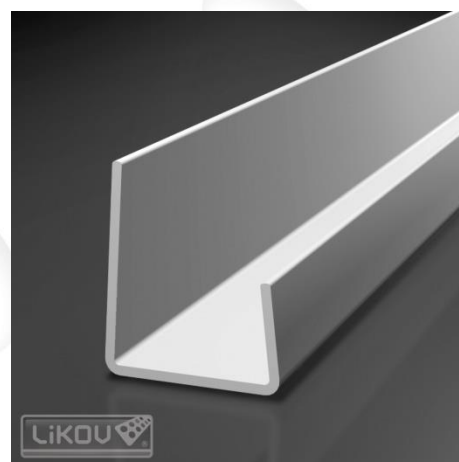

Technical data:

Material	PVC
Color	white;
board thickness [mm]:	9,5, 12,5, 15
bead wall thickness [mm]:	0,9 - 1,1
bead length [mm]:	2500, 3000
Height of the front edge [mm]:	10
Height of the rear edge [mm]:	20

Issued on 1 February 2016.

This update invalidates all previous versions of this technical data sheet. The specified product dimensions are nominal and may range within the permitted manufacturing tolerances.