

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-13/0107**  
**of 3 March 2015**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Klimas Wkret-met screw-in plug eco-drive

Product family  
to which the construction product belongs

Screwed-in plastic anchor for fixing of external thermal  
insulation composite systems with rendering in concrete  
and masonry

Manufacturer

Klimas Sp. z o.o.  
Kuznica Kiedrzynska  
ul. Wincentego Witosa 135/137  
42-233 MYKANÓW  
POLEN

Manufacturing plant

Klimas Sp. z o.o.

This European Technical Assessment  
contains

15 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

Guideline for European technical approval of "Plastic  
anchors for fixing of external thermal insulation composite  
systems with rendering", ETAG 014, edition February  
2011,  
used as European Assessment Document (EAD)  
according to Article 66 Paragraph 3 of Regulation (EU)  
No 305/2011.

This version replaces

ETA-13/0107 issued on 16 May 2013

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission according to Article 25 Paragraph 3 of Regulation (EU) No 305/2011.

## Specific part

### 1 Technical description of the product

The screwed-in anchor Klimas Wkret-met eco-drive consists of an anchor sleeve made of polyamide and an accompanying specific screw of galvanised steel.

The anchor type eco-drive S is additionally combined with an insulation cover.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable EAD

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verification and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

The essential characteristics regarding mechanical resistance and stability are included under the Basic Works Requirement Safety in use.

#### 3.2 Safety in case of fire (BWR 2)

Not applicable.

#### 3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances contained in this European Technical Assessment, there may be requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

#### 3.4 Safety in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance	See Annex C
Edge distances and spacing	See Annex B
Point thermal transmittance	See Annex C
Plate stiffness	See Annex C
Displacements	See Annex C

English translation prepared by DIBt

**3.5 Protection against noise (BWR 5)**

Not applicable.

**3.6 Energy economy and heat retention (BWR 6)**

Not applicable.

**3.7 Sustainable use of natural resources (BWR 7)**

For the sustainable use of natural resources no performance was determined for this product.

**3.8 General aspects**

The verification of durability is part of testing the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

**4 Assessment and verification of constancy of performance (AVCP) system applied with reference to its legal base**

According to Decision 97/463/EC of the Commission of 27 June 1997 (Official Journal of the European Communities L 198 of 25.07.1997, p. 31–32) the system of assessment and verification of constancy of performance (AVCP) (see Annex V and Article 65 Paragraph 2 to Regulation (EU) No 305/2011) given in the following table apply.

Product	Intended use	Level or class	System
Plastic anchors for use in concrete and masonry	For use in systems, such as façade systems, for fixing or supporting elements which contribute to the stability of the systems	—	2+


**5 Technical details necessary for the implementation of the AVCP system, as provided in the applicable EAD**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 3 March by Deutsches Institut für Bautechnik

Uwe Bender  
Head of Department

*beglaubigt:*  
Ziegler

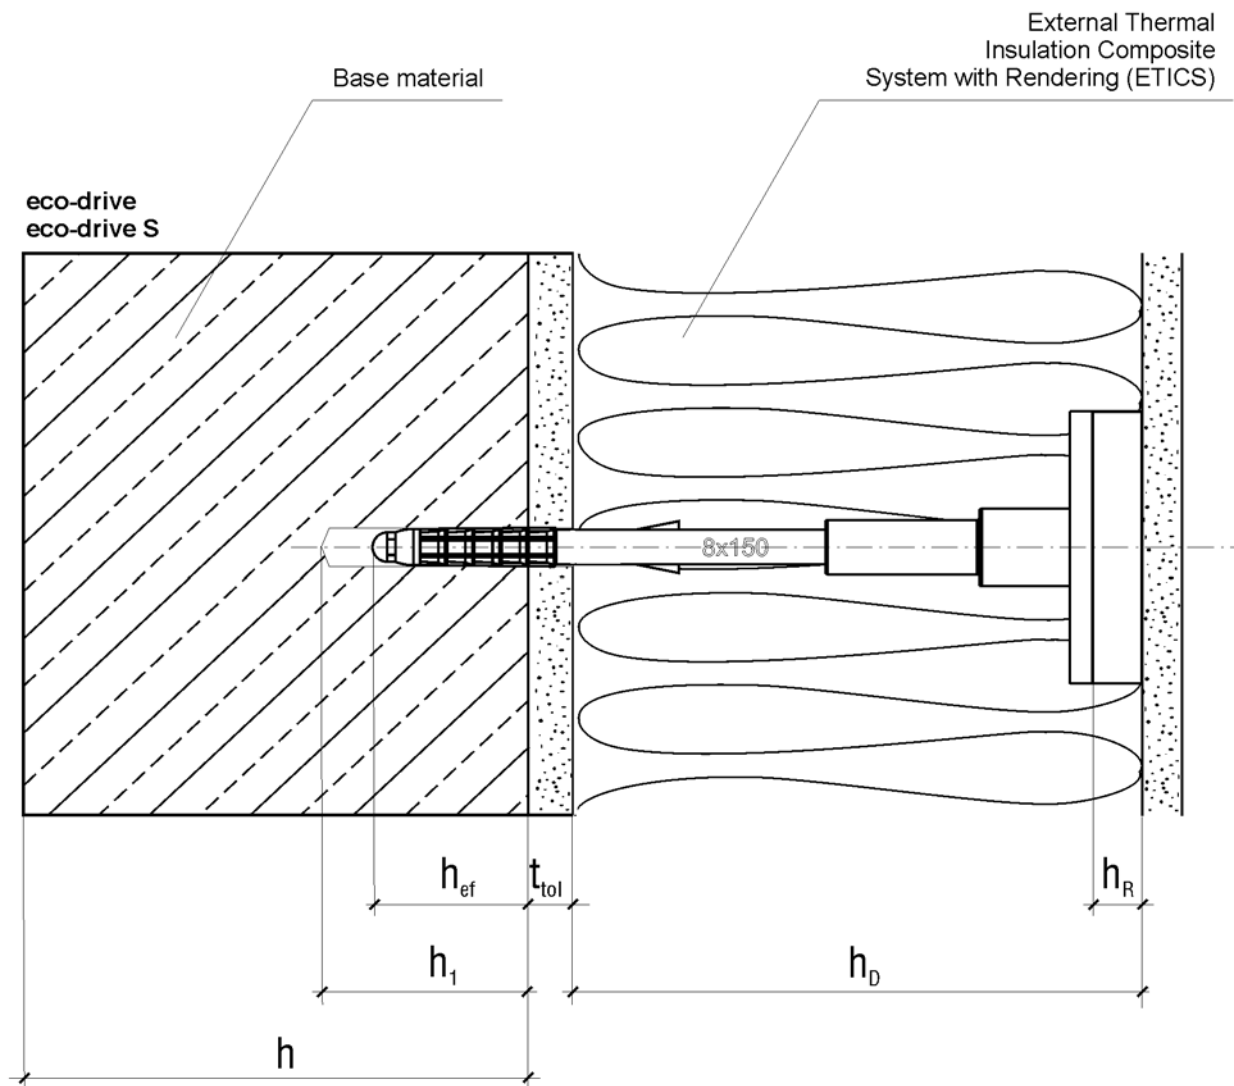

**Intended use**

Anchorage of ETICS in concrete, masonry and in autoclaved aerated concrete

**Legend:**


- $h_{ef}$  = effective anchorage depth
- $h_1$  = depth of drilled hole to deepest point
- $h$  = thickness of member (wall)
- $h_D$  = thickness of insulation material
- $t_{tol}$  = thickness of equalizing layer or non-load-bearing coating
- $h_R$  = thickness of insulation cover

Klimas Wkret-met screw-in plug eco-drive


**Product description**  
Intended use

**Annex A 1**

### Types of the anchor sleeve

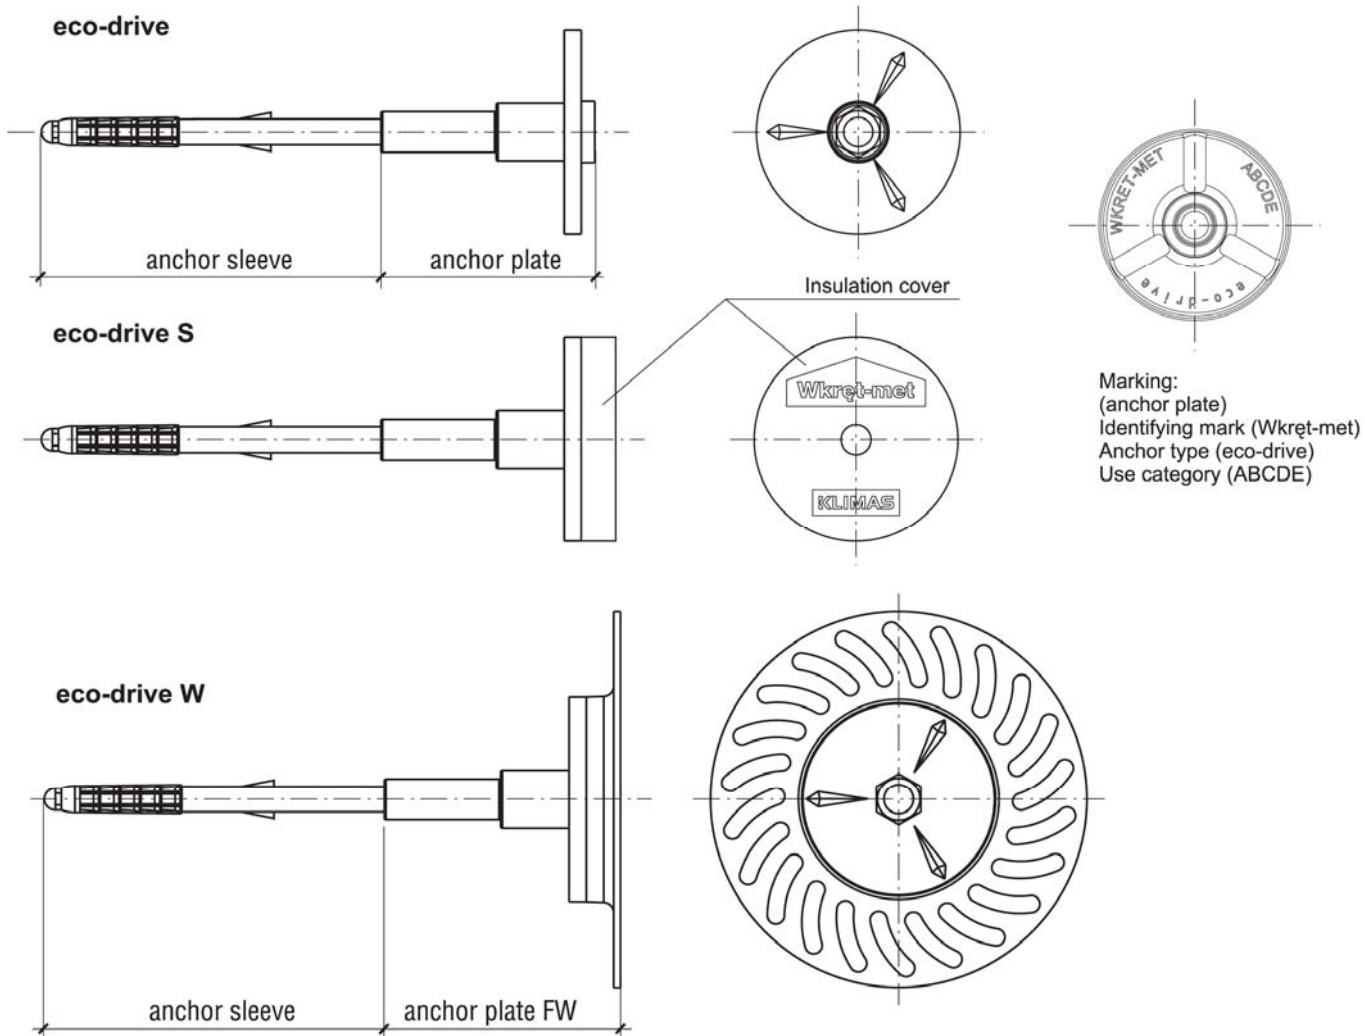

### Insulation cover

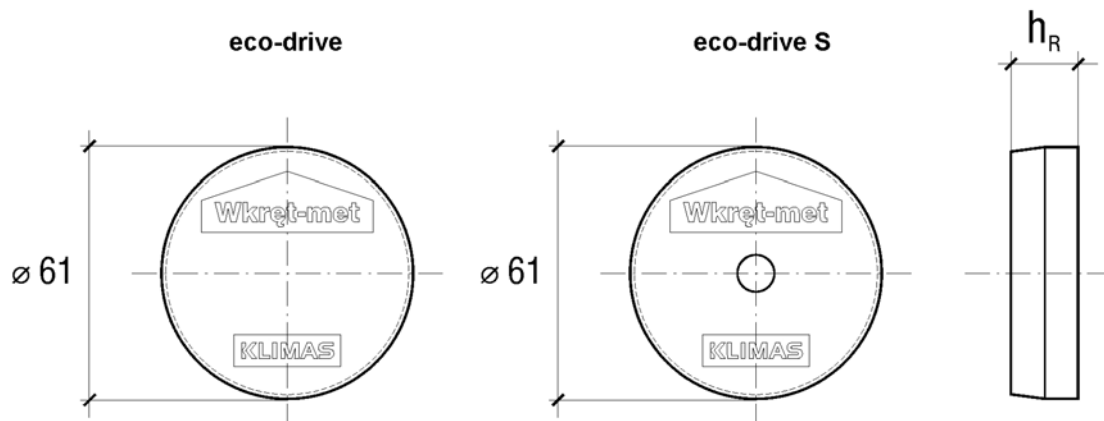


Klimas Wkret-met screw-in plug eco-drive


**Product description**  
Types of the anchor sleeve, insulation cover

**Annex A 2**


**Marking of the anchor sleeve  
Marking of effective anchorage depth**

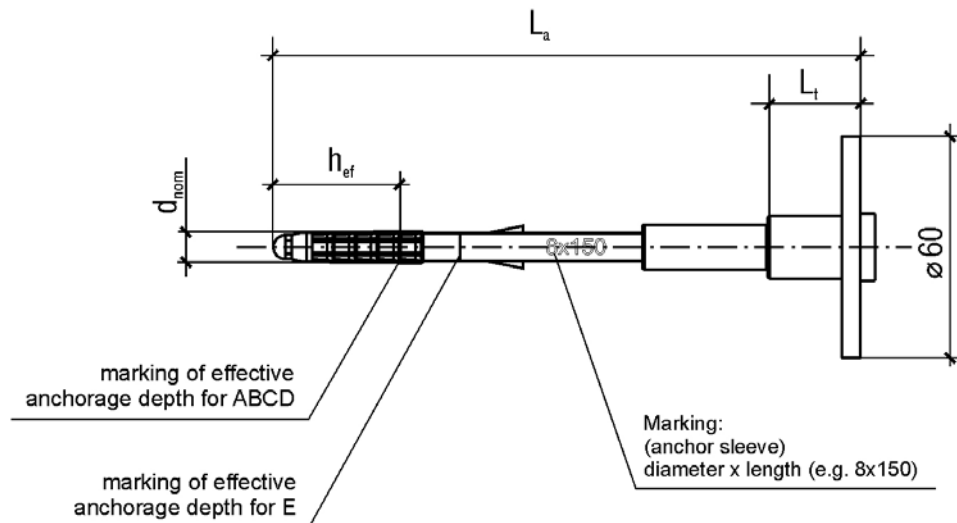

**Screw with an additional coating of the screw head**

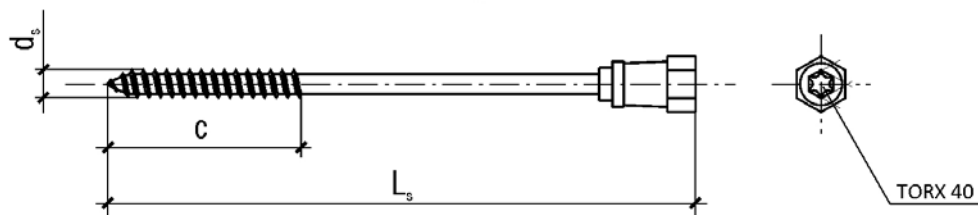

**Setting tool**

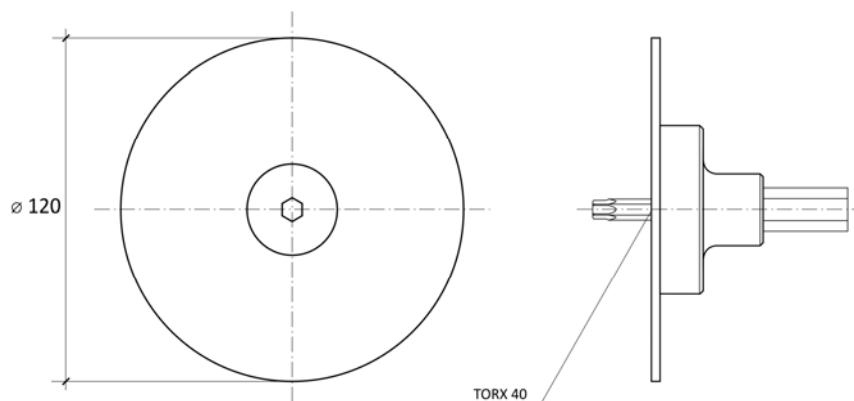

Klimas Wkret-met screw-in plug eco-drive

**Product description**  
Marking of the anchor sleeve, special screw, setting tool

**Annex A 3**

**Table A1: Dimensions**

Anchor type	Anchor sleeve				Specific screw		
	$d_{nom} \pm 0,1$	$\min L_a \pm 2$	$\max L_a \pm 2$	$h_{ef} \text{ ABCD / E}$	$d_s \pm 0,1$	$\min L_s \pm 2$	$\max L_s \pm 2$
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
eco-drive	8	130	490	35 / 55	5,7	90	450

$L_t = 25 \text{ mm}$  (see figure on Annex A 3)

Determination of maximum thickness of insulation  $h_D$ :

$h_D = L_a - t_{tol} - h_{ef} - L_t$  (e.g.  $L_a = 150 \text{ mm}$ ,  $t_{tol} = 10 \text{ mm}$ )

e.g.  $h_D = 150 - 10 - 35 - 25$

$h_{Dmax} = 80 \text{ mm}$

Use category ABCD:  $h_D = L_a - 70 \text{ mm}$

Use category E:  $h_D = L_a - 90 \text{ mm}$

**Table A2: Materials**

Element	Material
Anchor plate	Polyamide PA6 - GF, colour nature or grey
Anchor sleeve	Polyamide PA6, colour nature or grey
Insulation cover	EPS (expanded polystyrene); mineral wool
Screw	Steel galvanized zinc plated $\geq 5 \mu\text{m}$ according to EN ISO 4042, screw head coated with Polyamide PA6-GF, colour nature or red

Klimas Wkret-met screw-in plug eco-drive

**Product description**  
Dimensions of the anchor sleeve, special screw materials

**Annex A 4**



## Specifications of intended use

### Anchorage subject to:

- The anchor may only be used for transmission of wind suction loads and shall not be used for the transmission of dead loads of the thermal insulation composite system.

### Base materials:

- Normal weight concrete (use category A) according to Annex C 1
- Solid masonry (use category B), according to Annex C 1
- Hollow or perforated masonry (use category C), according to Annex C 1
- Lightweight aggregate concrete (use category D), according to Annex C 1
- autoclaved aerated concrete (use category E), according to Annex C 1
- For other base materials of the use categories A, B, C, D or E the characteristic resistance of the anchor may be determined by job site tests according to ETAG 014 Edition February 2011, Annex D.

### Temperature Range:

- 0°C to +40°C (max. short term temperature +40°C and max. long term temperature +24°C)

### Design:

- The anchorages are designed in accordance with the ETAG 014 Edition February 2011 under the responsibility of an engineer experienced in anchorages and masonry work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings.
- Fasteners are only to be used for multiple fixings of thermal insulation composite systems.

### Installation:

- Hole drilling by the drill modes according to Annex C 1
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Installation temperature from 0°C to +40°C
- Exposure to UV due to solar radiation of the anchor not protected by rendering  $\leq 6$  weeks

Klimas Wkret-met screw-in plug eco-drive

**Intended use**  
Specifications

**Annex B 1**


**Table B1: Installation parameters**

Anchor type		eco-drive	eco-drive
Use category		ABCD	E
Drill hole diameter	$d_0$ [mm]	8	8
Cutting diameter of drill bit	$d_{cut}$ [mm]	$\leq 8,45$	$\leq 8,45$
Depth of drill hole to deepest point	$h_1$ [mm]	$\geq 45$	$\geq 65$
Overall embedment depth in the base material	$h_{ef}$ [mm]	$\geq 35$	$\geq 55$

**Table B2: Minimum thickness of member, spacing and edge distance**

Anchor type		eco-drive
minimum thickness of member	$h_{min} =$ [mm]	100
minimum spacing	$s_{min} =$ [mm]	100
minimal edge distance	$c_{min} =$ [mm]	100

Scheme of spacing and edge distances

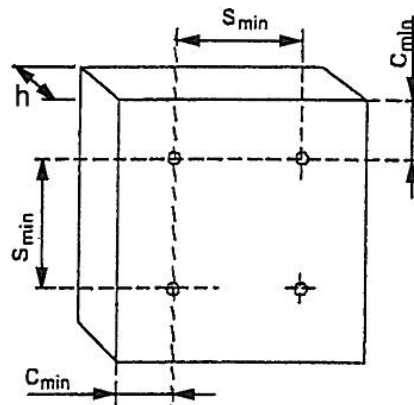

Klimas Wkret-met screw-in plug eco-drive

**Intended use**



Installation parameters, minimum thickness of member, spacings and edge distances

**Annex B 2**

### Installation instructions

#### eco-drive S

#### eco-drive

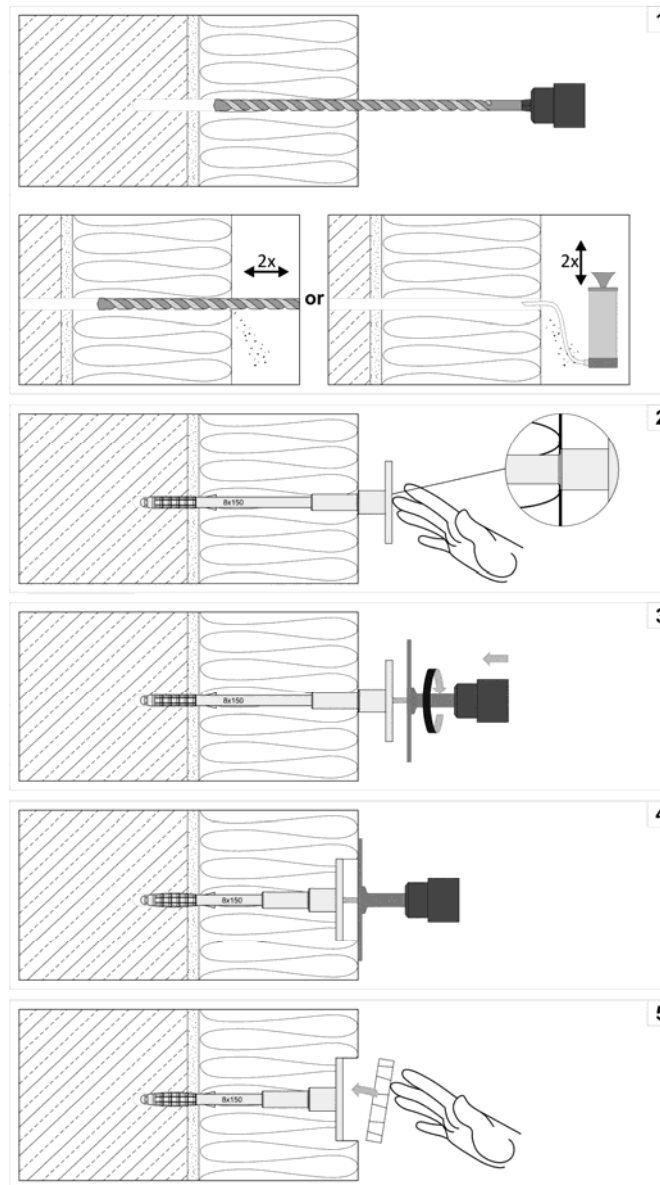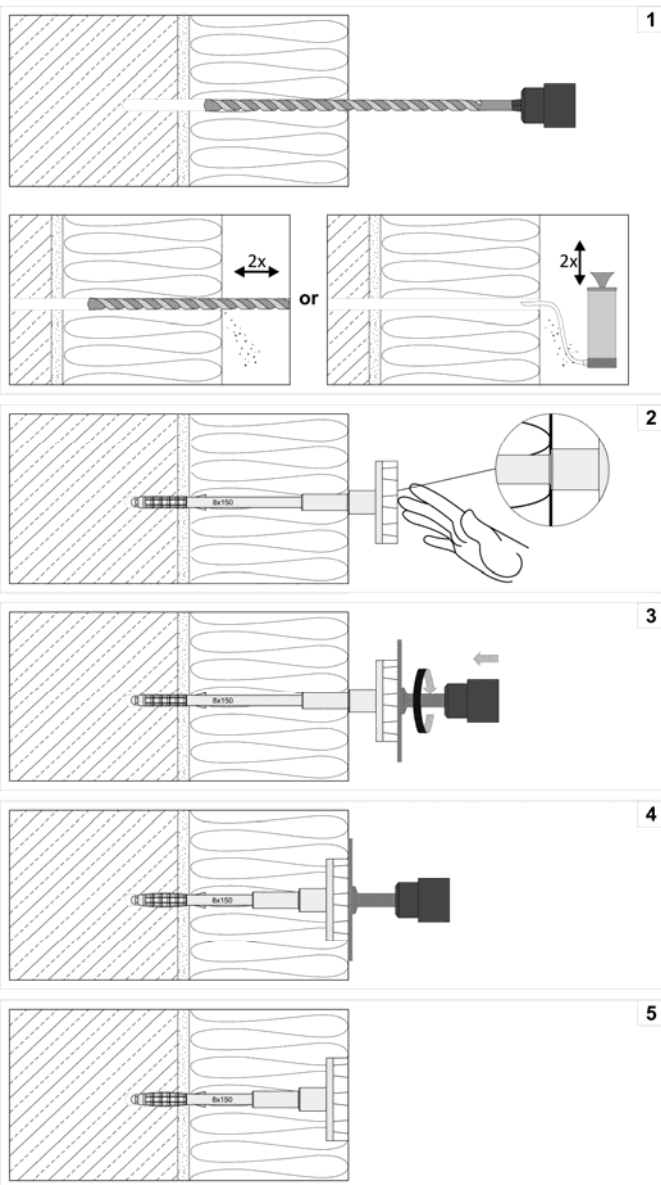


Klimas Wkret-met screw-in plug eco-drive

**Intended use**  
Installation instructions eco-drive, eco-drive S

**Annex B 3**

### Installation instructions

#### eco-drive W

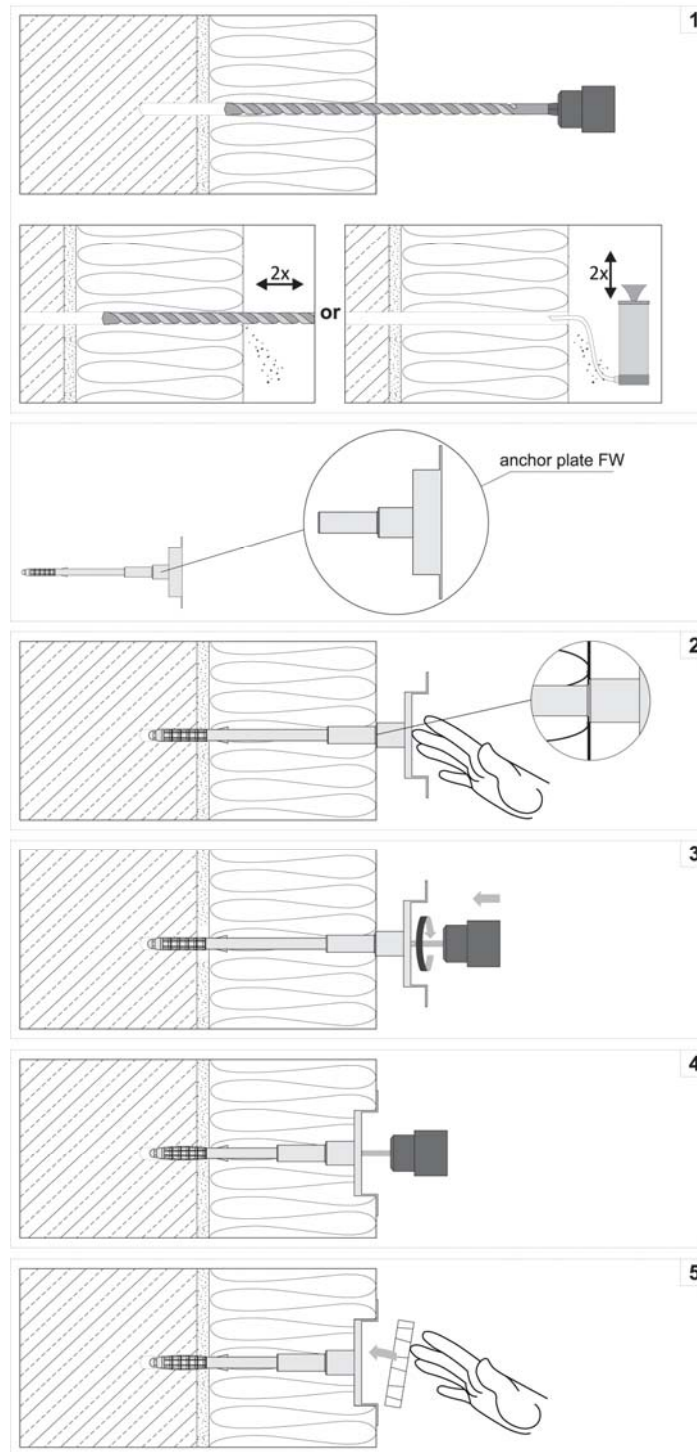

Klimas Wkret-met screw-in plug eco-drive

**Intended use**  
Installation instructions eco-drive W

**Annex B 4**

**Table C1: Characteristic resistance  $N_{Rk}$  for use in concrete and masonry each anchor**

Base material	Bulk density class [kg/dm <sup>3</sup> ]	Minimum compressive strength [N/mm <sup>2</sup> ]	General remarks	Drill method	$N_{Rk}$ [kN]
Concrete C12/15 EN 206-1:2000-12	-	-		hammer	1.2
Concrete C16/20 - C50/60 EN 206-1:2000-12	-	-		hammer	1.5
Solid clay brick Mz EN 771-1:2011-07 / DIN 105-100:2012-01	≥ 2.0	≥ 20.0		hammer	1.5
Sand-lime solid bricks KS (e.g. KS NF 20-2.0) EN 771-2:2011-07 / DIN V 106:2005-10	≥ 2.0	≥ 20.0		hammer	1.5
Vertically perforated sand-lime bricks KSL (e.g. KSL-R(P) 8DF) EN 771-2:2011-07 / DIN V 106:2005-10	≥ 1.6	≥ 12.0	Minimum outer web thickness a = 30 mm	hammer	1.5
Vertically perforated clay bricks HLz (e.g. HLz B – 1.0 NF 12-1) EN 771-1:2011-07 / DIN 105-100:2012-01	≥ 1.2	≥ 12.0	Minimum outer web thickness a = 13 mm	rotary	1.5
Lightweight concrete hollow blocks Hbl EN 771-3:2011-07 / DIN 18151-100:2005-10	≥ 0.8	≥ 2.0	See Annex C 3	rotary	1.5
Lightweight aggregate concrete LAC EN 1520:2011-06 / EN 771-3:2011-07	≥ 1.05	≥ 5.0		rotary	0.9
Autoclaved aerated concrete AAC 2 EN 771-4:2011-07 / DIN V 4165-100/2005-10	≥ 0.35	≥ 2.0		rotary	0.6
Autoclaved aerated concrete AAC 7 EN 771-4:2011-07 / DIN V 4165-100/2005-10	≥ 0.65	≥ 3.5		rotary	1.2

Klimas Wkret-met screw-in plug eco-drive

**Performances**  
Characteristic resistance

**Annex C 1**

**Table C2: Point thermal transmittance according EOTA Technical Report TR 025:2007-06**

Anchor type	Insulation thickness $h_D$ [mm]	point thermal transmittance $\chi$ [W/K]
eco-drive	80	0.0017
eco-drive	150	0.002
eco-drive	420	0.0016

**Table C3: Plate stiffness according EOTA Technical Report TR 026:2007-06**

Anchor type	Diameter of the anchor plate [mm]	Load resistance of the anchor plate [kN]	Plate stiffness [kN/mm]
eco-drive	60	2,8	0,6

**Table C4: Displacements**

Base material	Bulk density class $\rho$ [kg/dm <sup>3</sup> ]	Minimum compressive strength $f_b$ [N/mm <sup>2</sup> ]	Tension load N [kN]	Displacements $\delta_m(N)$ [mm]
Concrete C12/15 EN 206-1:2000-12	-	-	0,4	2,9
Concrete C16/20 - C50/60 EN 206-1:2000-12	-	-	0,5	3,2
Solid clay brick, Mz EN 771-1:2011-07	≥ 2,0	20	0,5	3,6
Sand-lime solid bricks, KS EN 771-2:2011-07	≥ 2,0	20	0,5	3,2
Kalksandlochstein, KSL EN 771-2:2011-07	≥ 1,6	12	0,5	4,2
Vertically perforated sand-lime bricks HLz EN 771-1:2011-07	≥ 1,2	12	0,5	5,4
Lightweight concrete hollow blocks Hbl EN 771-3:2011-07	≥ 0,8	2	0,5	4,6
Lightweight aggregate concrete LAC EN 1520:2011-06 / EN 771-3:2011-07	≥ 1,05	5	0,3	3,6
Autoclaved aerated concrete AAC 2 EN 771-4:2011-07	≥ 0,35	2	0,2	2,8
Autoclaved aerated concrete AAC 7 EN 771-4:2011-07	≥ 0,65	3,5	0,4	4,2


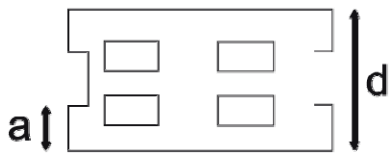
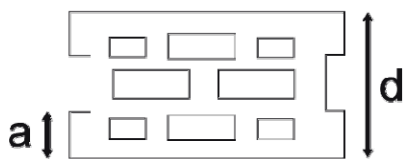
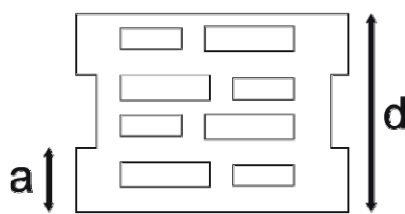
Klimas Wkret-met screw-in plug eco-drive

**Performances**

Point thermal transmittance, plate stiffness, displacements

**Annex C 2**

**Table C5: Assignment type of anchor for lightweight concrete hollow bricks according to DIN V 18151-100:2005-10**

Geometry	Thickness d [mm]	Outer web in longitudinal direction a [mm]	Anchor type  eco-drive eco-drive S
	175	50	■
	240 300	50	■
	175	35	■
	240 300 365	35	■
	240 300 365	30	■

The anchor shall be placed in the brick such way, that the spreading part of the expansion sleeve is located in the outer web.

Klimas Wkret-met screw-in plug eco-drive

**Leistungen**

Assignment type of anchor for lightweight concrete hollow bricks

**Annex C 3**