

R 96 A101

Applications

- Interior wall reinforcement
- Façade reinforcement

4,1 x 4,1
mm

118
g/m²

Dimensional characteristics

Square dimension warp/weft (mm)	4,1	4,1
Treated fabric weight (g/m ²)	118	
Loom state fabric weight (g/m ²)	98	
Treated fabric thickness (mm)	0,5	
Standard roll width/length (m)	1	50
Standard pallet no. of rolls	35	

Chemical characteristics

Glass	E
Coating	alkali resistant

Mechanical characteristics

Tensile strength in standard conditions warp/weft (N/5 cm)	2100	1600
Elongation in standard conditions warp/weft (%)	3,5	3,5

Options Available

- Color adjustment: yes
- Fabric softness: C, D
- Logo print: yes
- Width: 10 cm – 100 cm
- Length: 50 m – 2 000 m



Other options than mentioned to be checked with a product manager.

Quality Inspection

Quality inspection, sampling and material acceptance follows the Customer Acceptance Standard No. 0326.

Packing


The rolls of fabrics are packed vertically in a cardboard box, on a wooden pallet. A precise method of packing is mentioned in the works standard for packing and can vary based on a customer request.

Storing

Packed rolls are to be stored in dry rooms. Storing temperature is from -10 °C to +50 °C.



Vertex®

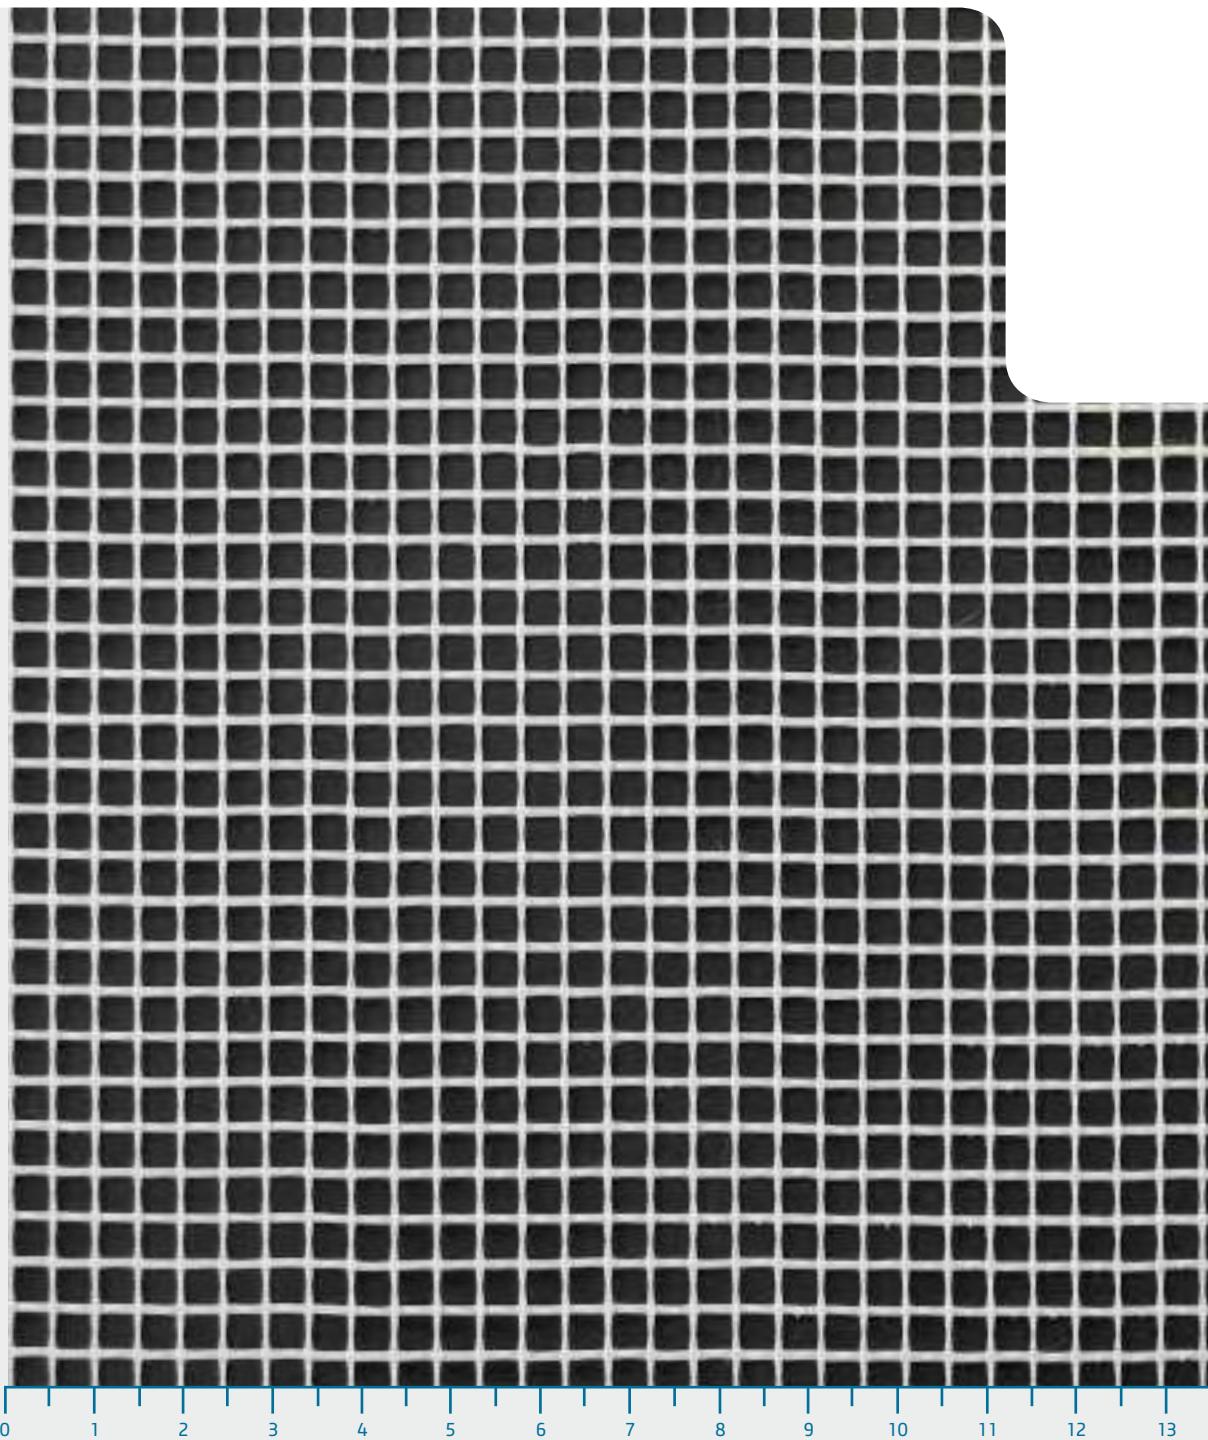

0 1 2 3 4 5 6 7 8 9 10 11 12 13

