

## G-LPU

**G-LPU** finishing bead for creating and protecting corners in drywall construction

### Material:

- Hard aluminium

### Features:

- Minimizes time required for creating perfect plaster termination
- Creates protection against corner damage
- Use with gypsum-based materials is only possible if ventilation is ensured during construction work and a later occurrence of humidity is eliminated
- Suitable for thin compounds and plasters

### Instructions for Use:


Before starting plastering work, use a spirit level to align the bead to correct position. Use a stapler to fix the bead into plasterboard structures and then trowel the whole section with an appropriate compound or plaster.

### Packing, Storage, Transport:

Store in a dry place in horizontal position in such a way that beads sagging and deformations are prevented.


### Certification:

The product is not subject to any harmonized standard. The product has been certified voluntarily in TZÚS Praha, s.p. (Technical and Test Institute for Construction Prague). The product has been given Certificate No 060-040966.

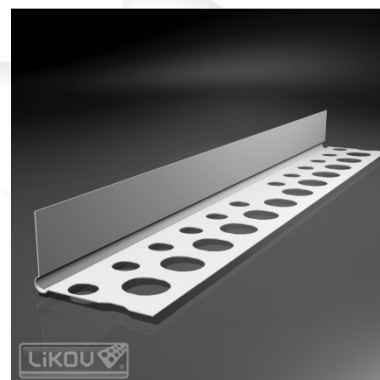

### Technical Data:

Material	Hard aluminium
Sheet thickness D [mm]:	0,3 / 0,35 / 0,40
Length [mm]	2500, 3000
Arm width A x B [mm]	23 x 13
Fire reaction class	A1

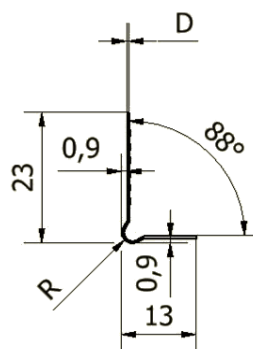

Issued 14.11.2017.

The updated technical sheet supersedes the previous version. The stated dimensions of the product are nominal and may range within the allowable manufacturing tolerances.