


Eurovent ROLL GEO

Single-layer ventilating tape designed for ridge and hips. Made of profiled aluminum sheet, thermosetting geotextile and butyl adhesive tape. The aluminum sheet and the nonwoven are glued and stitched together for increased durability of the product.

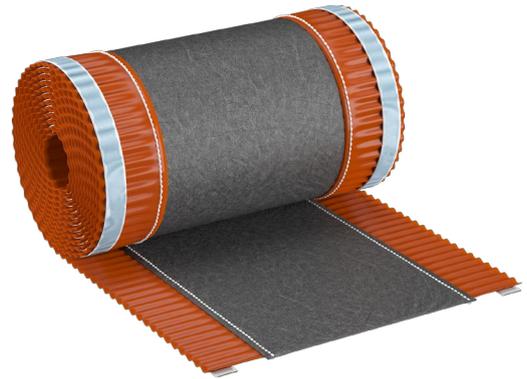

Advantages:

- effective ventilation
- UV resistance
- fast and easy application

Technical data:

Parameter	Value
Components:	aluminum, nonwoven based polypropylene geotextile, butyl
Roll width	180mm; 240 mm; 310 mm
Roll length	5 mb
Aluminium	Width: 50 mm, 70 mm Thickness: 0,12 mm
Butyl	15mm x 1,5mm, color- black
UV resistance	resistant

Parameter	Value
Geotextile:	Width: 120 mm, 180 mm, 310 mm, Thickness: 0,7 mm Weight.: 100 g/m ² Tensile strength (MD): 290 N/5cm Tensile strength (CMD): 240 N/5 cm Tensile strain at max. load (MD): 67% Tensile strain at max. load (CMD): 70%
Packaging	4 rolls in box 180mm - 192 rolls on pallet 240mm, 310mm - 144 rolls on pallet

Application:

Tape is designed for use as sealing and ventilating element for roof ridges and hips. It protects the roof covering against penetration of snow, rain, moisture and dust while ensuring proper air circulation within roof covering. Different sizes ranging from 240 to 390 mm enable application with cement and clay tiles as well as metal roofing.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 11/2015

Eurovent **ROLL GEO**

Storage / transport:

The product should be stored in a dry place, under cover, free from moisture and UV radiation. The rolls are made partially from elastic aluminum- please store in original, closed boxes. Please protect from damages. Rolls should be transported in covered means of transport. They should be prepared for transport in a manner that protects them from damage and destruction. During transport safety regulations must be observed. The product should be protected from chemical agents, in particular solvent-based substances, as they can reduce technical parameters of foil or permanently damage it.

The product is under warranty, providing that the guidelines contained in technical data sheet are being obeyed. We reserve the right to refuse a complaint recognition in case of not following these guidelines.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 11/2015