


Eurovent ROLL METAL

Single-layer ventilating tape designed for ridge and hips. Made of profiled aluminum sheet and butyl adhesive tape. Perforated aluminum ensures proper air circulation within the roof covering while ventilating moisture accumulated in thermal insulation.

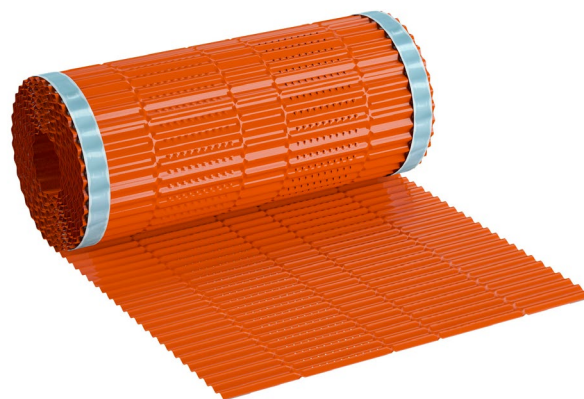

Advantages:

- large ventilation area
- UV resistance
- fast and easy application

Technical data:

| Parameter | Value |
|----------------|---|
| Material | Perforated aluminum, butyl tape. |
| Roll's width | 300 mm 400 mm |
| Roll's length | 5 mb |
| Aluminum sheet | Width: 300 mm, 400 mm Thickness: 0,12 mm |

| Parameter | Value |
|------------|--|
| Butyl tape | Size: 15 mm x 1,5 mm, Color: black Adhesion: >19 N/cm Density: 1,48 g/cm ³ Compression 50%: 100 kN/m ² |
| Packaging | 4 rolls in a box 300 mm - 144 rolls/pallet 400 mm - 100 rolls/pallet |

Application:

Tape is designed for use as sealing and ventilating element for roof ridges and hips. It protects the roof covering against penetration of snow, rain, moisture and dust while ensuring proper air circulation within roof covering.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 11/2015

Eurovent **ROLL METAL**

Storage / transport:

Rolls should be stored in a dry place, under cover, free from moisture and UV radiation. The rolls are made partially from elastic aluminum- please store in original, closed boxes. Please protect from damages. Rolls should be transported in covered means of transport. They should be prepared for transport in a manner that protects them from damage and destruction. During transport safety regulations must be observed. The product should be protected from chemical agents, in particular solvent-based substances, as they can reduce technical parameters of foil or permanently damage it.

The product is under warranty, providing that the guidelines contained in technical data sheet are being obeyed. We reserve the right to refuse a complaint recognition in case of not following these guidelines.

Contained information, advice and guidance is given based on our knowledge, researches, experiments and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 11/2015