

WELDED ALUMINUM INSPECTION DOORS

CLASSIC KL 25 mm

square key lock, fixed hinges

The doors are manufactured from aluminium profiles welded together to form the inner and the outer frame. The complete set is connected with fixed hinges to allow opening of the doors when needed.



By default, this model is manufactured in thickness 25 mm (2x12,5 mm) with white or green panel mounted into the inner frame with screws.

The main advantages of the model:

- **Welded frames**
- **Low-profile lock**
- **Secured lock**
- **Version for 2x12,5 mm system**
- **Firmly attached inner frame**

Opening and closing is enabled by rotating a plastic four-sided key inside the slot in the inner frame, which then opens the lock. The key is included.

Atypical dimensions and other custom options same as the 12,5 mm version.

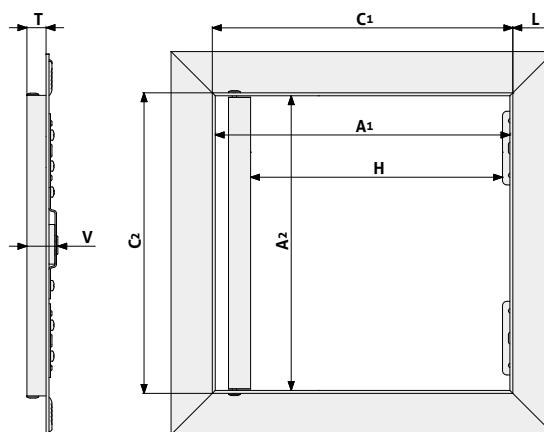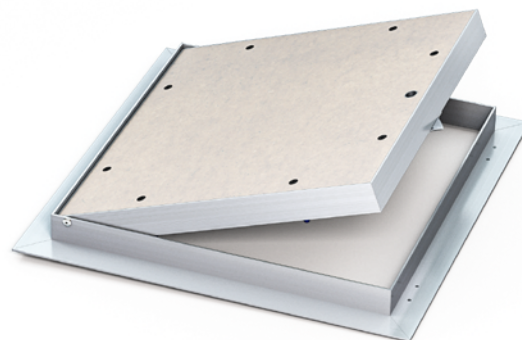

Minimum size	Maximum size
150 mm x 150 mm	1000 mm x 1000 mm
Square	Partition
Ceiling	

White board GKB for dry environment

Order no.	Article name (A1 x A2)	Weight	Installation size			Pure manhole	Height		
			C1	C2	L	H	A2	T	V
TMD-5171	RDS 200x200x25 GKB KL	1,27 kg	204	204	25,5	156	200	25,5	33,5
TMD-3195	RDS 300x300x25 GKB KL	2,41 kg	304	304	25,5	256	300	25,5	33,5
TMD-5172	RDS 400x400x25 GKB KL	3,93 kg	404	404	25,5	356	400	25,5	33,5
TMD-5173	RDS 500x500x25 GKB KL	5,80 kg	504	504	25,5	456	500	25,5	33,5
TMD-3344	RDS 600x600x25 GKB KL	8,05 kg	604	604	25,5	556	600	25,5	33,5

Green board GKBi – impregnated for wet environment

Order no.	Article name (A1 x A2)	Weight	Installation size			Pure manhole	Height		
			C1	C2	L	H	A2	T	V
TMD-5174	RDS 200x200x25 GKBi KL	1,29 kg	204	204	25,5	156	200	25,5	33,5
TMD-5175	RDS 300x300x25 GKBi KL	2,47 kg	304	304	25,5	256	300	25,5	33,5
TMD-5176	RDS 400x400x25 GKBi KL	4,02 kg	404	404	25,5	356	400	25,5	33,5
TMD-5177	RDS 500x500x25 GKBi KL	5,96 kg	504	504	25,5	456	500	25,5	33,5
TMD-5178	RDS 600x600x25 GKBi KL	8,27 kg	604	604	25,5	556	600	25,5	33,5

