# **TAMADEX**

## **TECHNICAL SHEET**

PRESSED ALUMINUM INSPECTION DOORS

# CLASSIC 12.5 mm

push lock, removable

The doors are manufactured from proprietary aluminium profiles, which are pressed together with reinforcing zinc-coated corners to create the inner and outer frame. The complete set is not connected using fixed hinges and allows the door to be removed from the frame if required.

By default, this model is produced with a white or green panel mounted into the frame with screws. Upon customer request it is possible to mount the panel using a high-strength adhesive, which enables quick and easy finishing.

The main advantages of the model:


- Reinforced pressed corners
- Removable inner frame to increase opening size
- Minimal gap
- Safety chain included
- Easily replaceable door panel right after installation

Comfortable opening and closing is made possible with two push-locks located in corners of the outer frame. Pressing the door panel in the place where the lock is located makes the latch open and close.


The doors are equipped with a safety chain, which prevents the door from falling out by accident.







White board GKB for dry environment		Installation size			Pure manhole		Height		
Order no.	Article name (A1 x A2)	Weight	C1	C2	L	н	A1	т	v
TMD-5190	RDL 200x200x12.5 GKB US (R)	0,84 kg	204	204	24	174	200	13	43
TMD-5191	RDL 200x300x12.5 GKB US (R)	1,09 kg	204	304	24	274	200	13	43
TMD-5192	RDL 300x300x12.5 GKB US (R)	1,42 kg	304	304	24	274	300	13	43
TMD-5193	RDL 300x400x12.5 GKB US (R)	1,76 kg	304	404	24	374	300	13	43
TMD-5194	RDL 300x600x12.5 GKB US (R)	2,43 kg	304	604	24	574	300	13	43
TMD-5195	RDL 400x400x12.5 GKB US (R)	2,19 kg	404	404	24	374	400	13	43
TMD-5196	RDL 400x600x12.5 GKB US (R)	3,04 kg	404	604	24	574	400	13	43
TMD-5197	RDL 500x500x12.5 GKB US (R)	3,13 kg	504	504	24	474	500	13	43
TMD-5198	RDL 600x600x12.5 GKB US (R)	4,26 kg	604	604	24	574	600	13	43
TMD-5199	RDL 700x700x12.5 GKB US (R)	5,57 kg	704	704	24	674	700	13	43

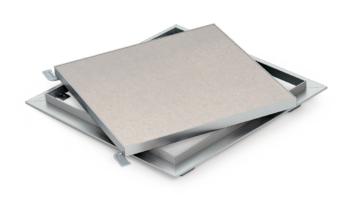



# **TAMADEX**

## **TECHNICAL SHEET**

Rooms with higher air humidity, like bathrooms or wet rooms, require using the more resistant green panel, which contains an impregnation layer. These doors can also be used for gluing on ceramic tiling, hiding the aluminium frame and creating the so-called invisible door.

Custom options:

- Panel attached with glue instead of screws
- Different 12,5 mm thick panel (GKF, GKFi, blue acoustic, perforated...)
- Optional no panel
- Atypical dimensions
- Door with fixed hinge

The doors are packed by 2 in a cardboard box.

Green board GKBi – impregnated for wet environment		Installation size			Pure manhole		Height		
Order no.	Article name (A1 x A2)	Weight	C1	C2	L	н	A1	т	V
TMD-5200	RDL 200x200x12.5 GKBi US (R)	0,85 kg	204	204	24	174	200	13	43
TMD-5201	RDL 200x300x12.5 GKBi US (R)	1,10 kg	204	304	24	274	200	13	43
TMD-5202	RDL 300x300x12.5 GKBi US (R)	1,45 kg	304	304	24	274	300	13	43
TMD-5203	RDL 300x400x12.5 GKBi US (R)	1,79 kg	304	404	24	374	300	13	43
TMD-5204	RDL 300x600x12.5 GKBi US (R)	2,48 kg	304	604	24	574	300	13	43
TMD-5205	RDL 400x400x12.5 GKBi US (R)	2,23 kg	404	404	24	374	400	13	43
TMD-5206	RDL 400x600x12.5 GKBi US (R)	3,11 kg	404	604	24	574	400	13	43
TMD-5207	RDL 500x500x12.5 GKBi US (R)	3,20 kg	504	504	24	474	500	13	43
TMD-5208	RDL 600x600x12.5 GKBi US (R)	4,36 kg	604	604	24	574	600	13	43
TMD-5209	RDL 700x700x12.5 GKBi US (R)	5,71 kg	704	704	24	674	700	13	43



The outer and inner frames are joined together by metal corners that solidify the entire assembly. The corners are molded into the profile, which prevents their



### **SAFETY CHAIN**

For safety reasons, not only when installing into ceilings, the door is provided with a safety chain to prevent the inner frame from falling out when opened.

#### REMOVABLE

The door is not provided with firm hinges, as with other models. This allows removal of the inner frame after opening and widening the access for inspection.