



FORNITURE PER FINITURE D'INTERNI E ISOLAMENTI TERMOACUSTICI • PRODUZIONE • ELABORAZIONE  
COMMERCIALIZZAZIONE • IMPORT / EXPORT FISSAGGI • ACCESSORI METALLICI • UTENSILERIA TECNICA

## TECHNICAL DATA SHEET


Rev. 1

Data: 01/09/2016



ISO 9001

### NAMCP04 - PLASTERBOARD INSPECTION PANEL WITH ALUMINIUM FRAME "SERIES GR" - BOARD 13 mm

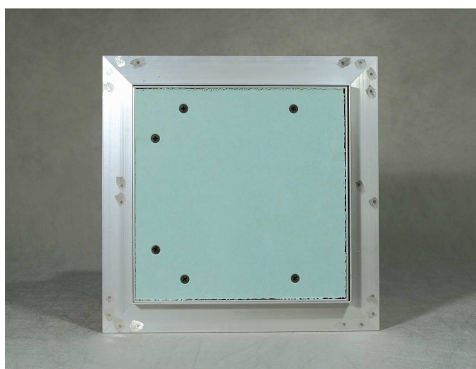

#### DESCRIPTION

Inspection panel with aluminum frame and plasterboard door; equipped with click-clac opening devices.

Use: inspection of plasterboard walls and ceilings. The frame is made with the innovative and patented Shark™ profile, that with its special design, facilitates grouting and ensures no spinning over time.

#### USE

- Use and assembly of the product are exclusively reserved for experienced personnel.
- The product is single-use because durability, stability, holding properties are guaranteed for a single application and it can in no case be reused in other applications.

#### Akifix S.p.A. - unipersonale

**Sede logistica e amministrativa:** Viale Caduti sul Lavoro, 9 - 11 - 13 - 60030 Monsano - Ancona - Italy  
Tel. +39 0731 61 90 25 Fax +39 0731 61 92 80

**Sede logistica e amministrativa Nord Italia:** Via dell'Adige, 5 - 39040 Cortaccia - Bolzano - Italy  
Tel. +39 0471 81 78 00

**Sede legale:** Corso Italia, 27 - 39100 Bolzano - Italy

C.F./P.IVA/ R.I. Bolzano 02395720424 Capitale sociale € 2.810.000,00 i.v.

**Website:** [www.akifix.com](http://www.akifix.com) **e-mail:** [info@akifix.com](mailto:info@akifix.com) [akifix@akifix.com](mailto:akifix@akifix.com)



FORNITURE PER FINITURE D'INTERNI E ISOLAMENTI TERMOACUSTICI • PRODUZIONE • ELABORAZIONE  
COMMERCIALIZZAZIONE • IMPORT / EXPORT FISSAGGI • ACCESSORI METALLICI • UTENSILERIA TECNICA

## TECHNICAL DATA SHEET

Rev. 1

Data: 01/09/2016



ISO 9001

### INSTRUCTIONS FOR USE AND INSTALLATION

- Use the template in the back of the package to draw the hole to be made on the plasterboard
- Make the hole previously drawn
- Remove the door from the frame and insert it through the opening hole in the wall / ceiling.
- Fix the frame to the plasterboard wall / ceiling with 3.5 x 35 mm self-tapping screws, our NF57003JY code. Depending on the size of the inspection hatch, two to three screws per side should be used.
- Stuff the frame outline to the plasterboard wall / ceiling.
- Replace the door inside the frame.
- Fill the door screws.
- After grouting, clean the outer frame from any residues. This process is essential for the inspection trap to close perfectly.
- When finished, insert the caps on the screws.

### WARNINGS

- The information on the inspection panel features to be used is indicated in the table "TECHNICAL INFORMATION".
- The risks of incorrect mounting are very important, to prevent them from paying attention to the anchors and the balance of the structure, and in any case all operations must be carried out by experienced personnel.

#### **Akifix S.p.A. - unipersonale**

**Sede logistica e amministrativa:** Viale Caduti sul Lavoro, 9 - 11 - 13 - 60030 Monsano - Ancona - Italy  
Tel. +39 0731 61 90 25 Fax +39 0731 61 92 80

**Sede logistica e amministrativa Nord Italia:** Via dell'Adige, 5 - 39040 Cortaccia - Bolzano - Italy  
Tel. +39 0471 81 78 00

**Sede legale:** Corso Italia, 27 - 39100 Bolzano - Italy

C.F./P.IVA/ R.I. Bolzano 02395720424 Capitale sociale € 2.810.000,00 i.v.

**Website:** [www.akifix.com](http://www.akifix.com) **e-mail:** [info@akifix.com](mailto:info@akifix.com) [akifix@akifix.com](http://akifix@akifix.com)



FORNITURE PER FINITURE D'INTERNI E ISOLAMENTI TERMOACUSTICI • PRODUZIONE • ELABORAZIONE  
COMMERCIALIZZAZIONE • IMPORT / EXPORT FISSAGGI • ACCESSORI METALLICI • UTENSILERIA TECNICA

## TECHNICAL DATA SHEET

Rev. 1

Data: 01/09/2016



ISO 9001

### TECHNICAL INFORMATION

Code	size (cm)	Hole size (cm)	Pcs in every pack
NAMCP04036	20 x 20	20,5 x 20,5	2
NAMCP04032	30 x 30	30,5 x 30,5	2
NAMCP04033	40 x 40	40,5 x 40,5	2
NAMCP04034	50 x 50	50,5 x 50,5	2
NAMCP04035	60 x 60	60,5 x 60,5	2

Type of plasterboard used in the door: HYDRO  
External frame profile width: 30 mm  
Aluminum thickness: 1.70 mm

#### Akifix S.p.A. - unipersonale

**Sede logistica e amministrativa:** Viale Caduti sul Lavoro, 9 - 11 - 13 - 60030 Monsano - Ancona - Italy  
Tel. +39 0731 61 90 25 Fax +39 0731 61 92 80

**Sede logistica e amministrativa Nord Italia:** Via dell'Adige, 5 - 39040 Cortaccia - Bolzano - Italy  
Tel. +39 0471 81 78 00

**Sede legale:** Corso Italia, 27 - 39100 Bolzano - Italy

C.F./P.IVA/ R.I. Bolzano 02395720424 Capitale sociale € 2.810.000,00 i.v.

**Website:** [www.akifix.com](http://www.akifix.com) **e-mail:** [info@akifix.com](mailto:info@akifix.com) [akifix@akifix.com](http://akifix@akifix.com)