



FORNITURE PER FINITURE D'INTERNI E ISOLAMENTI TERMOACUSTICI • PRODUZIONE • ELABORAZIONE
COMMERCIALIZZAZIONE • IMPORT / EXPORT FISSAGGI • ACCESSORI METALLICI • UTENSILERIA TECNICA


SCHEMA TECNICA

Rev. 1
Data: 01/09/2016



ISO 9001

NAMCP04 – METAL ACCESS PANEL

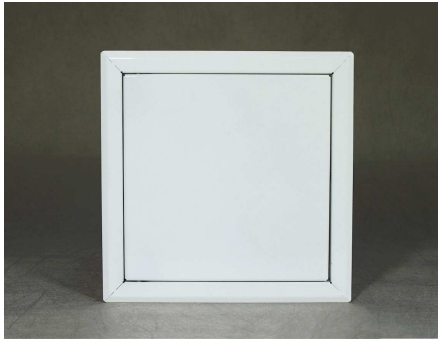

DESCRIZIONE

Inspection hatch in white lacquered steel

Application: TO INSPIRE WALLS AND PLASTER CEILINGS.

This inspection hatch is made of white lacquered steel, and is used to inspect plasterboard walls and ceilings.

USE

- The use and assembly of the product is exclusively reserved for expert personnel.
- The product is disposable in the sense that the characteristics of durability, stability, tightness are guaranteed for a single application and under no circumstances can it be reused in other applications.

INSTRUCTIONS FOR USE AND INSTALLATION

- Trace and create a hole in the wall or ceiling, paying attention to the distances from the frame profiles.
- Separate the outer frame and insert it into the hole and fix it with 3.5x25 mm gypsum screws.
- At the end, insert the protective capsules on the screws.

Akifix S.p.A. - unipersonale

Sede logistica e amministrativa: Viale Caduti sul Lavoro, 9 - 11 - 13 - 60030 Monsano - Ancona - Italy
Tel. +39 0731 61 90 25 Fax +39 0731 61 92 80

Sede logistica e amministrativa Nord Italia: Via dell'Adige, 5 - 39040 Cortaccia - Bolzano - Italy
Tel. +39 0471 81 78 00

Sede legale: Corso Italia, 27 - 39100 Bolzano - Italy

C.F./P.IVA/ R.I. Bolzano 02395720424 Capitale sociale € 2.810.000,00 i.v.

Website: www.akifix.com e-mail: info@akifix.com akifix@akifix.com



SCHEMA TECNICA

Rev. 1
Data: 01/09/2016



FORNITURE PER FINITURE D'INTERNI E ISOLAMENTI TERMOACUSTICI • PRODUZIONE • ELABORAZIONE
COMMERCIALIZZAZIONE • IMPORT / EXPORT FISSAGGI • ACCESSORI METALLICI • UTENSILERIA TECNICA

WARNINGS

- Information on the characteristics of the hatch to be used are indicated in the "TECHNICAL INFORMATION" table.
- The risks due to a wrong assembly are quite important, to prevent them we must pay close attention to the anchors and balancing of the structure and in any case all operations must be carried out by expert personnel.
- **RESISTANCE TO SALT SPRAY TEST 48H**

TECHNICAL INFORMATION

Code	Description	Size (cm)	Hole size (cm)	Pcs for each package
NAMCP04000	Metal access panel	20 x 20	21,5 x 21,5	2
NAMCP04001	Metal access panel	30 x 30	31,5 x 31,5	2
NAMCP04002	Metal access panel	40 x 40	41,5 x 41,5	2
NAMCP04005	Metal access panel	50 x 50	51,5 x 51,5	2
NAMCP04003	Metal access panel	60 x 60	61,5 x 61,5	2
NAMCP04006	Metal access panel	60 x 80	61,5 x 81,5	2
NAMCP04004	Metal access panel	60 x 120	61,5 x 121,5	2

Frame sheet thickness: 0.8 mm

Door sheet thickness: 0.7 mm

Frame width: 20 mm

Fire reaction class A1

Akifix S.p.A. - unipersonale

Sede logistica e amministrativa: Viale Caduti sul Lavoro, 9 - 11 - 13 - 60030 Monsano - Ancona - Italy
Tel. +39 0731 61 90 25 Fax +39 0731 61 92 80

Sede logistica e amministrativa Nord Italia: Via dell'Adige, 5 - 39040 Cortaccia - Bolzano - Italy
Tel. +39 0471 81 78 00

Sede legale: Corso Italia, 27 - 39100 Bolzano - Italy

C.F./P.IVA/ R.I. Bolzano 02395720424 Capitale sociale € 2.810.000,00 i.v.

Website: www.akifix.com e-mail: info@akifix.com akifix@akifix.com